





**PROCEDURES FOR CHANGING FILTERS - D.I.Y.**

1. A : Turn off storage tank (turn valve clockwise cross tubing 90°)

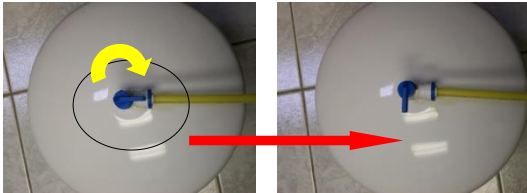

B : Open drinking water faucet

2. Turn off water feed valve (turn valve clockwise tightly)  
At this point, some water will be dripping from faucet wait until dripping stops.



3. Set a plastic bowl beneath the system put the wrench on and turn the filter housing follow the arrow (see picture)



Open

Close

- ✧ 3 stages RO: ①Carbon Block ③Carbon Block
- ✧ 4 stages RO: ①Sediment ②Carbon Block
- ✧ 5 stages RO: ①Sediment ②GAC ③Carbon Block.



4. For the last filter replacement ④ or ⑤ (inline active carbon cartridge) would be as follows:

A: Remove the inline filter from the clip



C: The flow direction indicated by the filter back into the water



B: Presses a tube lock, pull out the mains

**Finally, remember to revert step 1 to 2, system will resume normal after 2-3 hours.**